

Chemtrol™ CT2000

PROGRAMMABLE CONTROLLER

**AUTOMATED
WATER TREATMENT**

for Cooling Towers, Boilers & Wastewater

The **CHEMTROL™ CT2000** Programmable Controllers use an advanced microprocessor-based technology that introduces a new standard of sophistication in automated water treatment. Applications include cooling towers, boilers, industrial process water, food processing, drinking water & wastewater treatment.

KEY FEATURES

- ✓ **CONDUCTIVITY** control with choice of bleed programs
- ✓ **pH** control with automatic acid and base feed
- ✓ **TEMPERATURE** monitoring
- ✓ **LANGELIER SATURATION INDEX** for water balance
- ✓ **ADDITIVE FEED PROGRAMS** (inhibitor, biocide, etc.)
- ✓ **ON-BOARD DATA LOGGING** with adjustable intervals
- ✓ **REMOTE COMPUTER OPERATION** under *Windows™*

THE CHEMTROL™ ADVANTAGE

- ✓ 5-Year Electronic Warranty
- ✓ Large screens with easy-to-use menus and submenus
- ✓ True duplex remote operation with *Windows™* graphics display
- ✓ Dynamic probe testing with sensor failure warning
- ✓ Choice of 1, 2 or 3-point calibration for all sensors
- ✓ Multiple facilities on single phone line
- ✓ Strong dealer support program




SIMPLE AND RELIABLE

The CHEMTROL™ CT2000 controllers are easy to install and operate. All menus are displayed on a large LCD graphic display with choice of English, French or Spanish and US or metric units. Entries are made on the 16-key front panel keypad. Each unit is supplied with a complete instruction manual and a **FIVE-YEAR electronics warranty**.

EXPERT TECHNICAL SUPPORT

Expert technical support - based on more than 30,000 installations worldwide since 1976 - is available by toll-free phone, fax or e-mail. With remote computer operation, **direct technical support** is available on-line from our Service Department or from a **CHEMTROL™** Qualified Dealer.

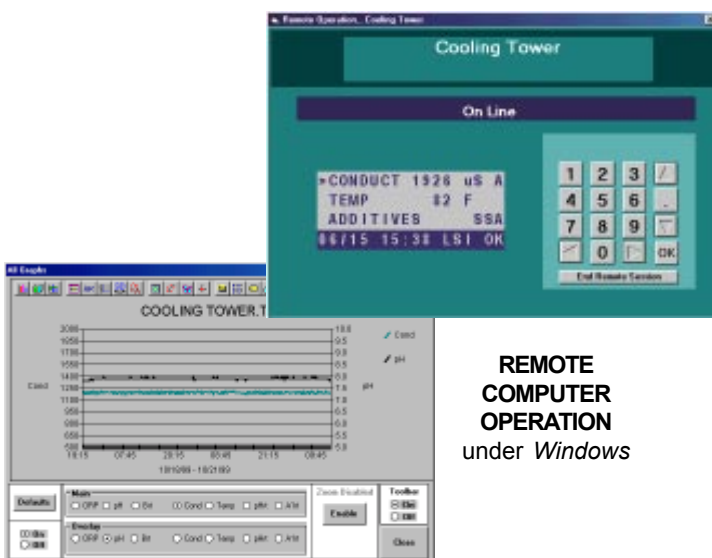

**REMOTE
COMPUTER
OPERATION**
under *Windows*

Visit our Web Site at www.sbcontrol.com or call today for a free demo CD-ROM



SANTA BARBARA CONTROL SYSTEMS


5375 Overpass Road
Santa Barbara, CA 93111 - USA

TOLL-FREE
PHONE
FAX
INTERNET

800-621-2279
805-683-8833
805-683-1893
www.sbcontrol.com

Leading in Automated Water Treatment Since 1976

COOLING TOWER INSTALLATION

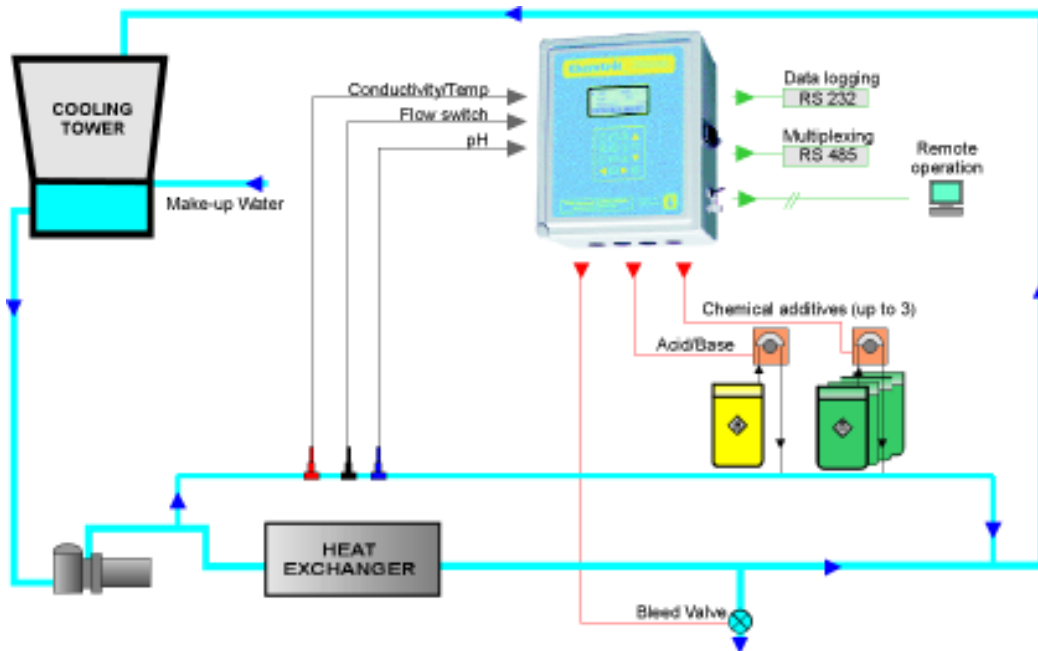

SPECIFICATIONS

CONDUCTIVITY / TDS	0-20,000 $\mu\text{S/cm}$ or ppm Conversion factor for TDS
pH	0-14 Setpoint for acid or base feed
TEMPERATURE	0 to 140 F (-18 to 60C)
SENSOR CALIBRATION	1, 2 or 3 points
CONTROL MODES	Off, Manual, Auto, Timer Bleed & Feed, Bleed-then-Feed Daily schedule
LANGELIER INDEX	Water balance display Calculated from pH, Temp, Total alkalinity & calcium hardness
ALARMS	High/Low out-of-range Overfeed and Total run time Patented Probe Alert* Safeguard Visual, audio and external alarms
DATA LOGGING	On-board memory for 999 tests RS232 communication port for local download and printing
NETWORKING	RS485 port for multiple connections
REMOTE OPERATION	Data communication modem CHEMCOM _{TM} remote software and graphical display under Windows TM
WARRANTY	5-year electronics 1-year sensors
ELECTRICAL	10 A / 110 or 230 V with selector switch All output relays 5 A
MECHANICAL	NEMA 4X fiberglass cabinet 11.21x9.21x6.09" (285x234x155 mm)
SHIPPING	16x16x12" (41x41x31cm) carton - 13 lbs (6.0 kg)

MODEL SELECTION

STANDARD FEATURES

- ✓ CONDUCTIVITY CONTROL
- ✓ TEMPERATURE DISPLAY
- ✓ THREE CHEMICAL FEED PROGRAMS
- ✓ CHEMICAL LEVEL ALARM
- ✓ LANGELIER SATURATION INDEX
- ✓ AUTOMATIC DATA LOGGING
- ✓ DIRECT SERIAL DOWNLOAD

OPTIONS

- pH CONTROL
- FLOW SWITCH
- FLOW SWITCH & SENSOR LINE ASSY
- REMOTE COMPUTER OPERATION
- RS485 FOR MULTIPLEXING
- AUTODIALER FOR ALARMS

REPRESENTED BY: