

Chemtrol[®] PC5000

PROGRAMMABLE CONTROLLER

AUTOMATED WATER TREATMENT
with control of
Free Chlorine, ORP and pH

* U.S. Patent 5,895,565

The **CHEMTROL[™] PC5000** programmable controller features a new **CHLORINE SENSOR** that gives easy-to-use, direct and reliable readings of **Free Chlorine (HOCl + OCl⁻ + Chlorinated Isocyanurates)** concentration in water.

Unlike older sensors, this sensor is simple to install and highly reliable. It does not require expensive reagents or special flow cells and is compatible with cyanuric acid (CYA) at all concentrations.

The combination of **Free Chlorine** and **ORP (Oxidation-Reduction Potential)** sensors gives the operator the capability to control either chlorine residual or oxidizing activity. This also makes it ideal for control of a separate oxidizer in the **AUTOMATED CHLORAMINE TREATMENT (ACT)** program.

STANDARD FEATURES

- ✓ **FREE CHLORINE CONTROL** in ppm or mg/l,
- ✓ **ORP CONTROL** of oxidizer with shock treatment program,
- ✓ **pH CONTROL** with acid/base feed and probe rinse program,
- ✓ Programmable **CHEMICAL SAVINGS** cycles,
- ✓ **TEMPERATURE READOUT** with programmable heater control
- ✓ **LANGELIER SATURATION INDEX** for water balance,
- ✓ **AUTOMATIC DATA LOGGING** for up to 999 tests,
- ✓ **FULL SCREEN MENUS** in English, French or Spanish,
- ✓ Screen displays in **US** or **METRIC UNITS**.

OPTIONS

- ✓ **CONDUCTIVITY** or **Total Dissolved Solids (TDS)** monitoring,
- ✓ **WATER LEVEL CONTROL** with electronic sensor and fill valve control,
- ✓ **MAIN PUMP CONTROL** and **FLOW RATE** with cumulative display,
- ✓ **INFLUENT/EFFLUENT PRESSURE** monitoring with safety alarms,
- ✓ **REMOTE COMPUTER OPERATION** and **GRAPHIC DATA DISPLAY**,
- ✓ **ETHERNET/INTERNET** network communications.


SIMPLE AND RELIABLE

The **CHEMTROL[™] PC5000** is a user-friendly and reliable controller that is easy to install and operate. All menus are displayed in clear language in English, French or Spanish with choice of US or metric units. Each unit is supplied with a comprehensive operation manual, on-site startup and training by a Qualified Dealer and a **FIVE-YEAR electronics warranty**.

Technical support is available through our network of Qualified Dealers and by computer with the **CHEMCOM[™]** Remote Operation Program.



Free Chlorine Sensor and Cell

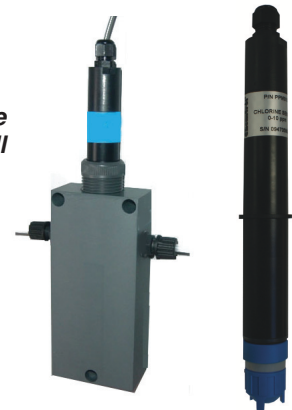

REMOTE COMPUTER OPERATION

Visit our Web Site at www.sbcontrol.com or call today for a free demo CD.



SANTA BARBARA CONTROL SYSTEMS


5375 Overpass Road
Santa Barbara, CA 93111 - USA

TOLL-FREE
PHONE
FAX
INTERNET

800-621-2279
805-683-8833
805-683-1893
www.sbcontrol.com

Leading in Automated Water Treatment Since 1976

POOL/SPA INSTALLATION

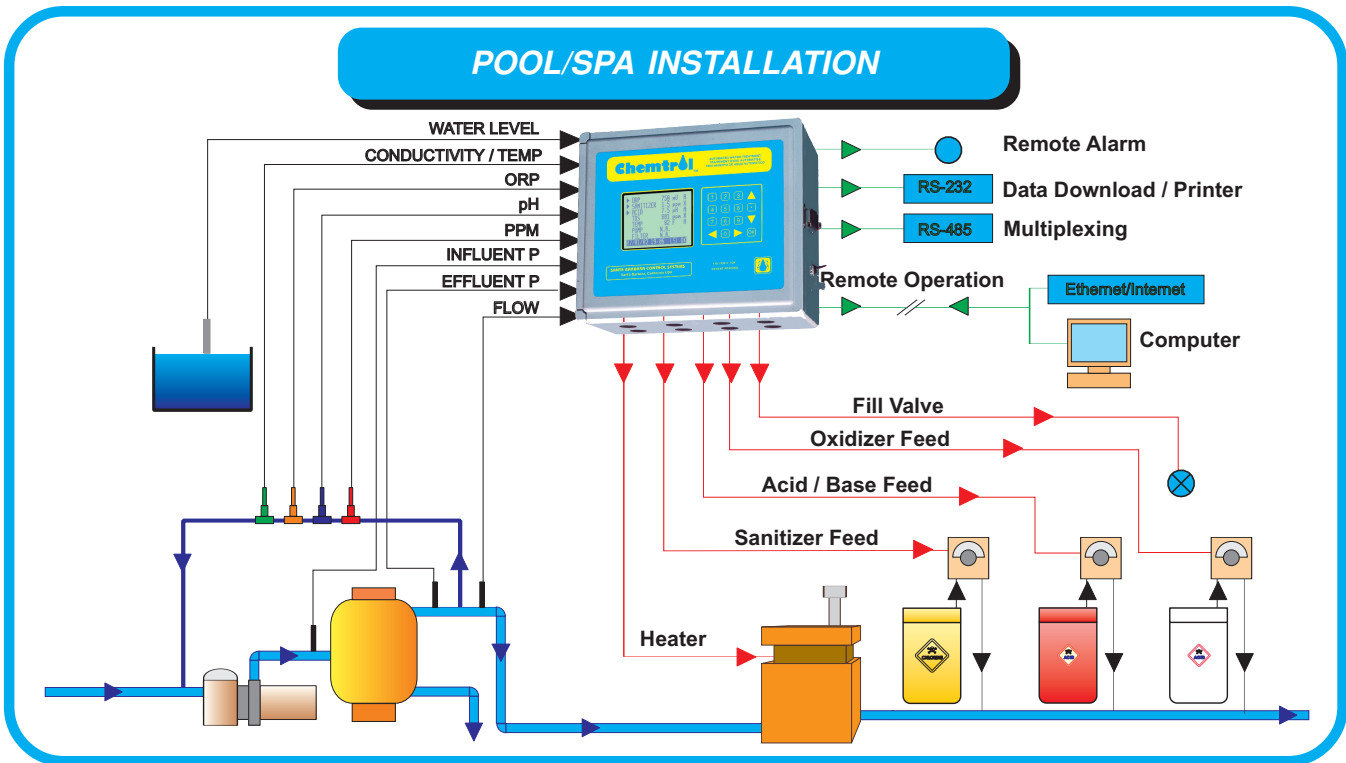

SPECIFICATIONS

SCREEN DISPLAY	8 lines @ 22 characters
ORP	200-999 mV with oxidizer and/or reducer Programmable shock treatment and chemical saving cycles
pH	0-14 with acid and/or base feed
FREE CHLORINE	0-2 or 0-10 ppm (mg/l)
CONDUCTIVITY / TDS	0-20,000 µS/cm conversion factor for TDS
TEMPERATURE	0 to 140 F (-18 to 60C)
LANGELIER INDEX	calculated from pH, Temp, total alkalinity and calcium hardness water balance display
SENSOR CALIBRATION	1, 2 or 3 points
CONTROL MODES	Off, Manual, Auto, Timer
ALARMS	ON/OFF or Proportional Feed High/Low out-of-range Total feed time and Overfeed Patented Probe Alert* Safeguard Visual, audio and external alarms
DATALOGGING	On-board memory for 999 tests RS232 communication port for local download and printing
REMOTE OPERATION	Data communication modem CHEMCOM™ remote software and graphical display under Windows™ Ethernet/Internet communications
MULTIPLEXING	RS485 port for multiple connections
MECHANICAL	13 x 11 x 6 1/2 in. (34 x 29 x 17 cm) Rain and splatter proof NEMA Type 4X
ELECTRICAL	15 A / 110 or 230 V with selector switch All output relays 5 A
WARRANTY	5-year electronics 1-year sensors
SHIPPING	19 x 19 x 11" (48 x 48 x 28 cm) carton Weight: 21 lbs (9.5 kg)

MODEL SELECTION

STANDARD FEATURES

- ✓ ORP CONTROL
- ✓ FREE CHLORINE CONTROL
- ✓ pH CONTROL
- ✓ HEATER CONTROL
- ✓ LANGELIER SATURATION INDEX
- ✓ AUTOMATIC DATA LOGGING
- ✓ REMOTE ALARM
- ✓ RS232 FOR DIRECT DOWNLOAD
- ✓ RS485 FOR MULTIPLEXING
- ✓ BYPASS LINE ASSEMBLY

OPTIONS

- CONDUCTIVITY/TDS MONITORING
- AUTOMATIC WATER LEVEL CONTROL
- INFLUENT / EFFLUENT PRESSURES
- REMOTE COMPUTER OPERATION
- ETHERNET/INTERNET COMMUNICATIONS
- FLOW RATE MONITORING
- RECIRCULATION PUMP CONTROL
- SENSOR CELL ASSEMBLY
- 4-20mA OUTPUT

REPRESENTED BY: