AUSTRALIA
CHEMTROL
Smart. Clean. Simple

Stainless Steel Solenoid valve

Key Features

- Forged body for durability and high pressure applications
- Valve body Material: SS304, Two ways, normally closed
- Working Pressure 0.3 ~ 16 Bar
- Rated protection: IP65, watertight electrical enclosure for outdoor use
- Closing feature minimizes water-hammer on shut-off
- Working Voltage: AC24V, AC110V, AC230V, AC240V (50Hz/60Hz), DC12V, DC24V

Model	Size	(mm)	Pressure AC / DC	Length (mm) L	W	H	Weight (Kg)
DHD31SL-10	3/8"	10	0.3 ~ 16 Bar	66	48	107	0.62
DHD31SL-15	1/2"	15	0.3 ~ 16 Bar	66	48	107	0.59
DHD31SL-20	3/4"	20	0.3 ~ 16 Bar	75	58	112	0.75
DHD31SL-25	1"	25	0.3 ~ 16 Bar	96	70	131	1.01
DHD31SL-32	1 1/4"	32	0.3 ~ 16 Bar	131	96	146	2.35
DHD31SL-40	1 1/2"	40	0.3 ~ 16 Bar	131	96	146	2.25
DHD36SL-50	2"	50	0.3 ~ 16 Bar	165	120	167	3.96

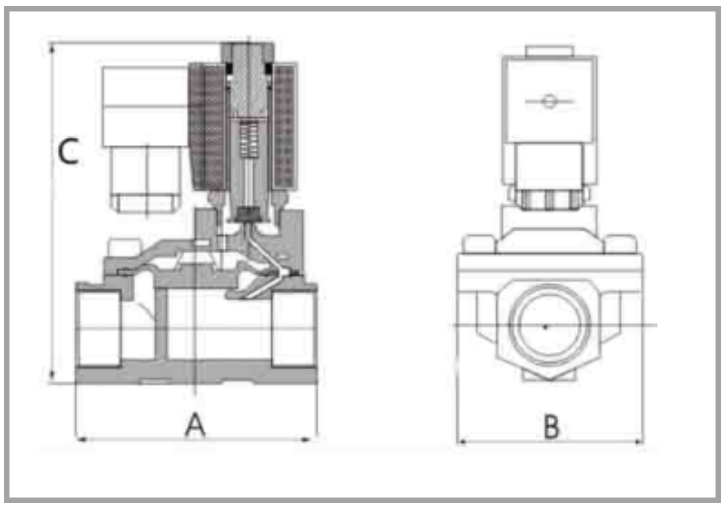

Specifications

- Valves body Material : SS304
- Rated protection : IP65
- Sealing Material : NBR
- Optional Viton sealing
- Temperature From : -5 to 80°C
- Durability : Water, Liquid, Air, Light oil
- AC/DC Working Pressure : 0.3 ~ 10 Bar

SANTA BARBARA CONTROL SYSTEMS

Santa Barbara, California USA

Leader in Chemical Automation since 1976