

## CHEMTROL® High Temperature conductivity sensor


Designed for high pressure, high temperature conductivity measurements, and is an ideal choice for boiler control applications. Blowdown control, condensate monitoring, leak detection on heat exchangers, and steam purity measurements are just a few of the many applications in which this rugged and reliable sensor can be used.

Wetted materials of construction are 316 stainless steel, PEEK, and EPDM o-rings. All possible leak paths through the sensor are double sealed with o-rings for maximum on-stream reliability. Hot water is a severe environment for any elastomer, and the front seals bear the brunt of chemical attack, allowing the back seals to remain relatively unaffected. The result is that sensor life is more than double what can be expected of single sealed, or epoxy sealed units.



## FEATURES

- Measure conductivity directly in process temperature up to 205°C
- O-ring seals used on all versions for high on-stream reliability
- Boiler condensate and blowdown control without coolers

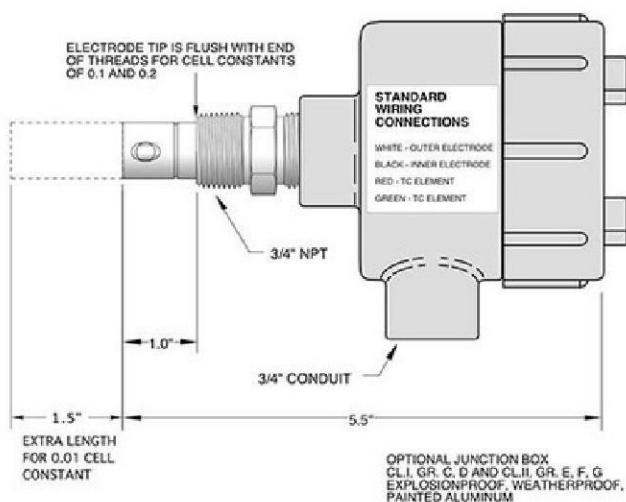

## SPECIFICATIONS

- **MAX. PRESSURE/TEMP. RATINGS:**  
Standard Sensor – 100 PSIG at 150°C  
High Temp. Sensor – 250 PSIG at 205°C  
Either Sensor – 500 PSIG at 100°C
- **WETTED MATERIALS:**  
Electrodes – 316 Stainless Steel  
Insulator – PEEK  
O-Rings – EPDM FDA APPROVED
- **CONNECTIONS:**  
Process – 3/4" MNPT  
Electrical – 3/4" FNPT conduit hub;  
terminal strip to accept stripped leads,  
14-24 ga.

